

FEATURES


- 7" 16:9 TFT Display
- 65536 True Color TFT LCD
- 32-bit, 800 MHz RISC CPU
- 128 MB FLASH + 64 DDR2
- 512 KB Recipe Memory, Record Data Easily
- Real-Time Clock, 2 Year Reserve Time when Powered Off
- 2 COM Ports, Supports Simultaneous Communication; RS232/RS422/RS485
- Input Voltage Range 21~28VDC
- Ethernet 10/100Mbps



DESCRIPTION

The MT4000 Series is a very powerful HMI product that will make your application soar. This HMI line comes with a 65536 color display mode that gives your touch screen rich color and incomparable resolution. With the application of a powerful 800 MHz 32-bit RISC processor, the MT4000 provides faster processing speeds. Each HMI supports simultaneous communications via its multiple serial ports, so that you may connect to different controllers at the same time. With the simple, convenient and powerful HMIware configuration software, the user can master its design method and create first-class programs efficiently.

DIMENSIONS

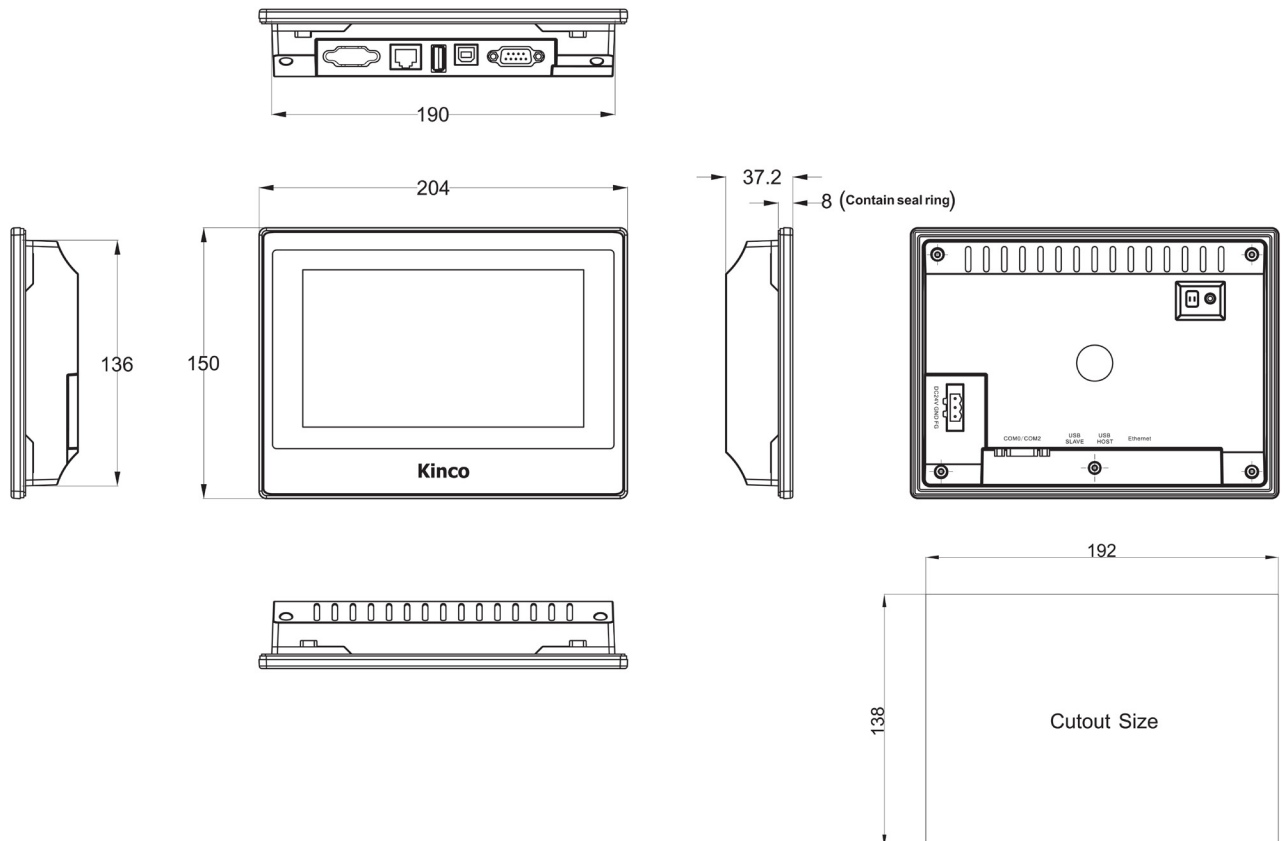

L011375

Performance Specifications	
Display	7" 16:9 TFT
Resolution	800 x 480 Pixels
Color	65,536 Colors
Backlight	LED
Brightness	250 cd/m ²
Backlight Life	50000 Hrs
Touch Panel	4-Wire Precision Resistance Network (Surface Harness 4H)
Processor	32-bit RISC CPU 800 MHz
Memory	128 MB Flash and 64MB Memory
Expandable Memory	1 USB Host, (≤16G)
Recipe Memory & RTC	512 KB & Real Time Clock
Printer Port	USB Slave / Host / Serial
Ethernet	10/100Mbps
Program Download	USB / Serial / Network Port
COM Port	COM0: RS232 / RS485 / RS422, COM2: RS232
Electrical Specifications	
Rated Power	7.2 W
Rated Voltage	24 VDC
Input Range	12 ~ 28 VDC
Power Down Allowed	< 3 ms
Insulation Resistance	> 50M Ω @ 500V DC
Dielectric Strength Test	500 VAC 1 Minute
Structure Specifications	
Shell Color	Black
Shell Material	Fire ABS Plastic
Dimensions(mm)	204 x 150 x 37mm
Cutout Size(mm)	192 x 138mm
Weight	0.5 Kg
Environment Specifications	
Operating Temperature	0°~50° C
Operating Humidity	10~90% Non-Condensing
Storage Temperature	-10°~60° C
Storage Humidity	10~90% Non-Condensing
Shockproof Test	10~25 Hz (X,Y, Z Direction, 2G, 30 Minutes)
Cooling Method	Natural Air Cooling
Certifications	
Degree of Protection	IP65 Certification (4208 a 93)
CE Certification	Comply with EN61000-6-2:2005 and EN61000-6-4:2007 Standards
FCC Compatibility	Complies with FCC Class A
UL Certification	Complies with UL 508